

Conductive End Cap




ECC

Conductive End Caps perform the same function as a standard insulating end cap, but with added feature of neutralising any potential induced voltages from nearby live power cables.

The caps are lined with a hot melt adhesive to provide a moisture tight seal and also conductive mastic coating in the base of the cap. The end cap is made from thermally stabilised, cross linked semi-conductive polymer and is suitable for use in temperatures between -30°C and +70°C, and with internal pressures up to 0.05MPa.



MATERIAL SPECIFICATIONS		
CHARACTERISTIC	VALUE	TEST METHOD
Physical Properties		
Specific Gravity	1.01 ± 0.2	ASTM D - 1505
Water Absorption	1% (max)	ASTM D - 570/ ISO 62
Tensile Strength	12 N/sqmm (min)	ASTM D - 412 / ISO 37
Ultimate Elongation	300% (min)	ASTM D - 412 / ISO 37
Hardness	40 ± 3 Shore D	ASTM D - 2240
Thermal Ageing Tests (120°C for 500 hours)		
Ultimate Elongation	250% (min)	ASTM D - 412 / ISO 37
Tensile Strength	10 N/sqmm (min)	ASTM D - 412 / ISO 37
Electrical Properties		
Volume Resistivity	1x10 ⁶ Ohm-cm (max)	ASTM D - 257 / IEC 93

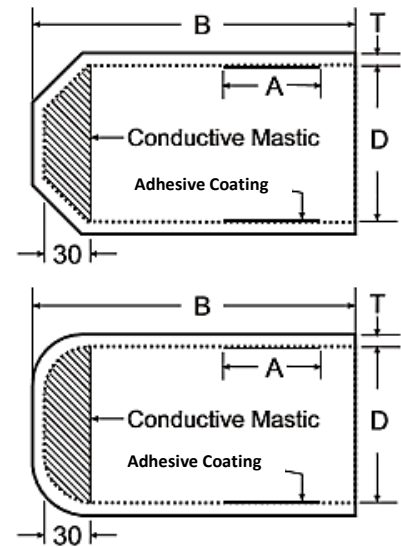

*Drawing shows typical parts

PRODUCT DIMENSIONS – ECC Series								
Code	Application Range	Diameter D		Length B		A	LC	T
		E	S	E	S	E	S	S
		mm	Min (mm)	Max (mm)	Min (mm)	Max (mm)	mm	%
ECC 14/4-40	5-13	14	4.5	45	40	15	+/-10	2.5
ECC 14/4-60	5-13	14	4.5	65	60	25	+/-10	2.5
ECC 16/6-45	7-14	16	6	50	45	15	+/-10	2.5
ECC 24/8-45	9-22	24	8	50	45	15	+/-10	2.8
ECC 24/8-45	9-22	24	8	70	65	20	+/-10	2.8
ECC 35/15-105	17-32	35	15	110	105	35	+/-10	3.2
ECC 35/15-160	17-32	35	15	170	160	50	+/-10	3.2
ECC 40/17-105	19-36	40	17	110	105	35	+/-10	3.2
ECC 40/17-160	19-36	40	17	170	160	50	+/-10	3.2
ECC 55/26-105	28-50	55	26	110	105	35	+/-10	4.2
ECC 55/26-135	28-50	55	26	145	135	50	+/-10	4.2
ECC 55/26-160	28-50	55	26	170	160	70	+/-10	4.2
ECC 62/25-105	28-56	62	25	110	105	35	+/-10	4.2
ECC 62/25-160	28-56	62	25	170	160	70	+/-10	4.2
ECC 75/34-105	37-68	75	34	120	105	100	+/-10	3.5
ECC 75/34-190	37-68	75	34	220	190	100	+/-10	3.5
ECC 105/45-105	50-95	105	45	120	105	70	+/-10	3.5
ECC 105/45-160	50-95	105	45	175	160	70	+/-10	3.5

***Key:**

E – As Supplied | S – After Free Recovery | LC – Longitudinal Change

REPL reserve the right to update the information contained in this document at any time without notice. It is the users responsibility to ensure it is suitable for the intended application. Any implied warranty relating to fitness for a particular purpose are explicitly excluded unless agreed in writing by REPL.

©REPL 2017

