

## CSEC

Cold Shrink End Caps are a convenient method to provide a moisture tight seal on all types of cable or conduits without the use of a heat source or special tools.


The caps are supplied pre-expanded on a removable core which is easily removed when the cap is placed in position by pulling out the spiral core and allowing the rubber end cap to shrink down to its original memory.

- Can be fitted over all types of plastic, metal and other materials
- Resistant to aggressive chemicals and moisture
- UV resistant
- Quick and easy installation using no heat source or tools
- Easily removed
- Standard Colour : Black
- Range of sizes covers diameters between 12mm and 75mm



### PRODUCT DIMENSIONS

Product Code	Application Diameter Range mm	Diameter $\varnothing D$		Length L	Thickness T	
		Expanded	Recovered	Recovered	Expanded	Recovered
		Min (mm)	Max (mm)	(mm)	(mm)	(mm)
CSEC 20/12	12 – 17	19.5	9.4	97	1.3	2.7
CSEC 28/16	17 – 24	27.9	12.6	98	1.3	2.6
CSEC 55/23	25 – 45	56.1	19.1	100	1.2	2.5
CSEC 80/46	46 – 75	78.5	44	100	2.0	2.8

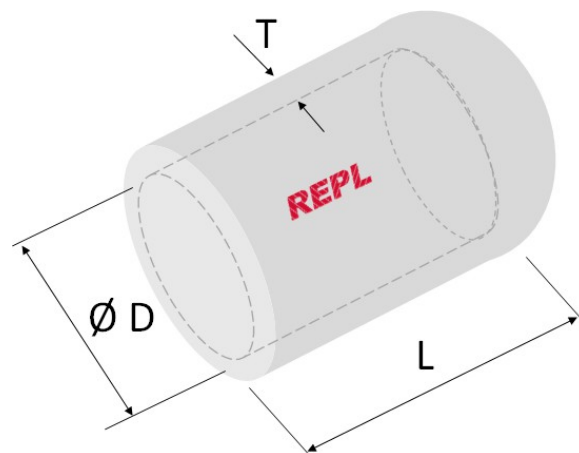

REPL reserve the right to update the information contained in this document at any time without notice. It is the users responsibility to ensure it is suitable for the intended application. Any implied warranty relating to fitness for a particular purpose are explicitly excluded unless agreed in writing by REPL.  
©REPL 2018